


SUSPENTES

| REFERENCE | oeil/émérillon | | | | chape/émérillon | | | | | oeil à maniller/émérillon | | | | |
|-----------|----------------|-----|----|-----|-----------------|----|----|-----|----|---------------------------|----|----|----|-----|
| | M | N | O | P | K | L | M | N | R | P | L | M | R | P |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm |
| KS 230-2 | 40 | 95 | 28 | 153 | 104 | 23 | 40 | 65 | 30 | 134 | 29 | 42 | 40 | 100 |
| KS 300-2 | 48 | 105 | 38 | 203 | 140 | 29 | 52 | 84 | 35 | 175 | 43 | 58 | 50 | 125 |
| KS 400-2 | 58 | 110 | 50 | 225 | 195 | 51 | 85 | 115 | 65 | 260 | 51 | 72 | 60 | 150 |
| KS 500-2 | 75 | 140 | 55 | 280 | 195 | 51 | 85 | 115 | 65 | 260 | 58 | 80 | 70 | 160 |


roulement à rouleaux

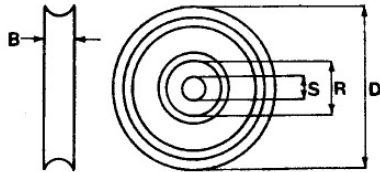

| REFERENCE | B | D | R | S | poids |
|-----------|----|-----|-----|----|-------|
| | mm | mm | mm | mm | kg |
| SKS 230-2 | 57 | 230 | 80 | 35 | 12,80 |
| SKS 300-2 | 66 | 300 | 100 | 45 | 18,20 |
| SKS 400-2 | 70 | 400 | 128 | 60 | 35,00 |
| SKS 500-2 | 76 | 515 | 140 | 65 | 42,50 |


REAS

roulement à rouleaux



| REFERENCE | X | Y | Z | poids |
|-----------|-----|----|----|-------|
| | mm | mm | mm | kg |
| PKS 230-2 | 118 | 35 | 78 | 1,10 |
| PKS 300-2 | 140 | 45 | 79 | 1,19 |

roulement à rouleaux



| REFERENCE | X | Y | Z | poids |
|-----------|-----|----|-----|-------|
| | mm | mm | mm | kg |
| PKS 400-2 | 217 | 60 | 97 | 8,00 |
| PKS 500-2 | 242 | 65 | 112 | 9,50 |

AXES